




Snake Brace S

Snake Brace M


Anchor point for through holes, designed to function as a link between the structure and the fall arrest, work positioning, rope access or rescue systems.

DESCRIPTION

Snake Brace S

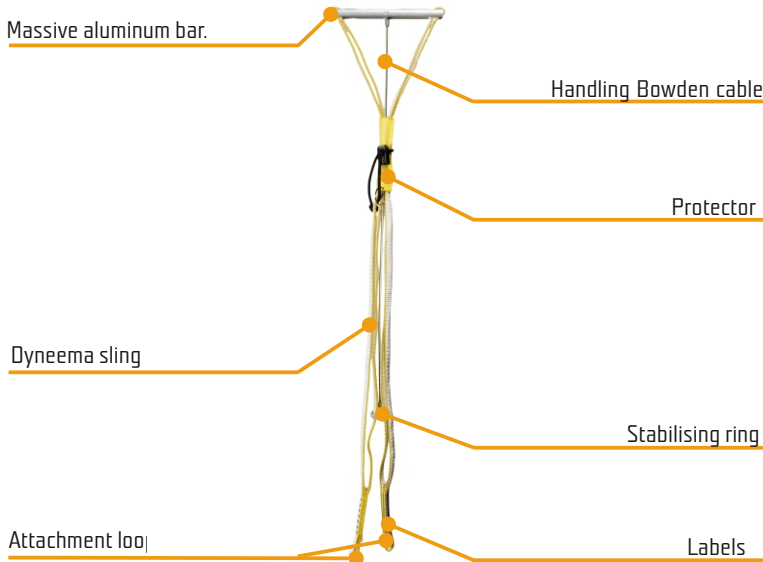

Snake Brace M

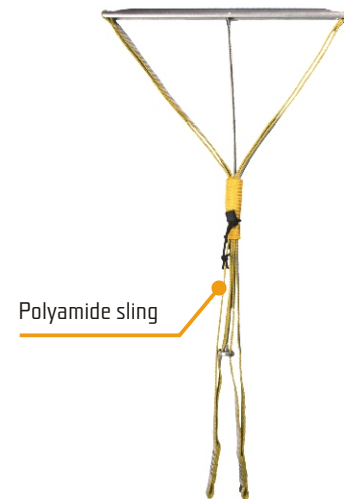

STANDARDS

CE 1019
EN 795 B:2012

FEATURES



one person
only



400g / 14 oz



unique
numbers



guarantee

MATERIAL COMPOSITION

- 38% aluminum alloy
- 46% steel
- 16% dyneema

TECHNICAL DATA

type	strength	hole \checkmark min. (mm)	construction thickness (mm)						min. open space
			>5	50	100	150	200	300	(mm)
			hole \checkmark max. (mm)						
S	18 kN	17,7	50	65	75	80	85	90	200
M	18 kN	22	175	195	210	225	235	255	450

Anchor point for through holes, designed to function as a link between the structure and the fall arrest, work positioning, rope access or rescue systems. Intended for through holes whose minimum and maximum diameter corresponds to the type of Snake Brace in relation to the actual thickness of the current structure. The opening need not be entirely regular but the minimum diameter must be flat. There must be a minimum space for installation behind the hole. **Intended for a single user.** The maximum strength can be used only if the structure in which the anchor hole is located can withstand the load in all directions. **The minimum strength of the construction should be designed according to EN 795** (if not in accordance with EN 795, the load bearing capacity may be reduced). Snake Brace can be loaded in any direction only if also allowed by the construction in which is anchored. Can be used **only with compatible connectors with locking mechanisms according to EN 362.**

