

RINGO

Detachable ring for arborists and workers at height. Intended for semi-permanent connection. Can be loaded in any direction.

DESCRIPTION

Strong and light body made of aluminium alloy.

Unique serial number.

Inner diameter: 46 mm.



10 mm clipping gap.

Steel bolt.

20 kN minimum strength in any direction.

KEY FEATURES

- inner diameter: 46 mm
- clipping gap: 10 mm
- minimum strength in any possible axis: 20 kN

STANDARDS

CE 1015

EN 362:2004/M

FEATURES

75 g / 2.6 oz

unique number


3 YEARS guarantee

revision needed

10 mm


20 kN strength


MATERIALS



- 91% slitina hliníku
- 9% nerezová ocel

TECHNICAL DATA

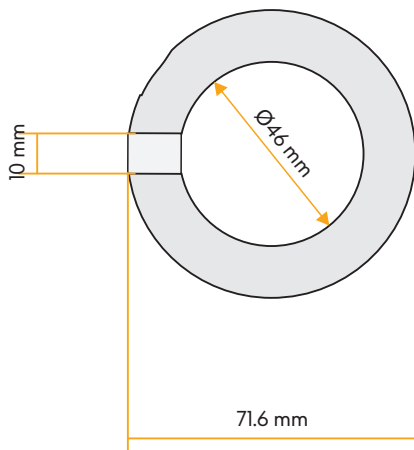



XXXX- unique serial number
K7002- product code
MMYY- month and year of production

ATTENTION: For semi-permanent use only. It is not intended for frequent connection/disconnection.

Lifetime of this product is not strictly limited.
Depending on the condition of the product and its history it may be necessary to retire it immediately.



read
instruction

	 <p>BOLT for RINGO 2 pcs K7003XX00</p>
WEIGHT	15 g (2 bolts)
MATERIAL	stainless steel