

TREE ANCHOR

Connection and anchor device for work at height. Multipurpose anchor device for creating the anchor point mainly on the tree. Designed for the arborists and rescuers.

DESCRIPTION

Strength stitching is covered with plastic cover.

Static rope \varnothing 11 mm.



Stitched steel ring at one rope end for variable use.

KEY FEATURES

- variable use
- long lifetime

STANDARDS

CE 1019

EN 354
EN 795B

FEATURES



1 person only



22 kN



500 cm



525 g




3 years warranty

MATERIALS



- 94 % PA
- 5 % steel
- 1 % PVC

TECHNICAL DATA

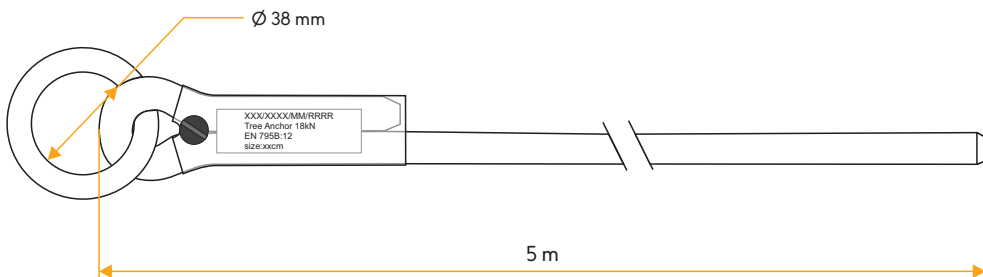

MAINTENANCE

Lifetime of this product depends on the frequency and the environment (salt, sand, moisture, chemicals, etc.) in which is used. Without taking wear or mechanical damage into account and in compliance with the conditions specified in the instructions for use this product may be used 15 years from the date of production and 10 years from the date of the first use.

However mechanical damage can occur during the first use, which can limit the lifetime of this products only to its first use.



beware of salt



beware of UV



beware of chemicals



washing



drying




read instructions

OTHER VIEWS



RELATED PRODUCTS

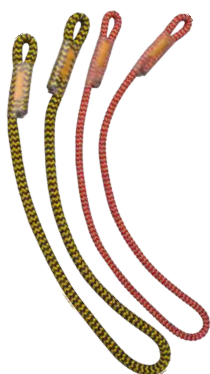

TIMBER ACCESSORY CORD

W2608, W2610



PULLEY SLING

W2603YB00



RING SLING

W2604RR00



PRUSIK SLING

W2601R085

LENGTH	75-100 cm	40 cm	40 cm	85 cm
ROPE DIAMETER	8 mm / 10 mm	10 mm	10 mm	8 mm / 10 mm
WEIGHT	48-55 g	160 g	115 g	48 g / 70 g